


L14

HURRICANE RATED Y-BLADE LOUVER: 1500AHR™

Inverted "Y" Blades with Security Grille Meets up to 350 ft lb Impact Rating for Severe Windstorm Rating. Electro-Galvanized Finish Provides Weatherproof Finish for Exterior Applications.

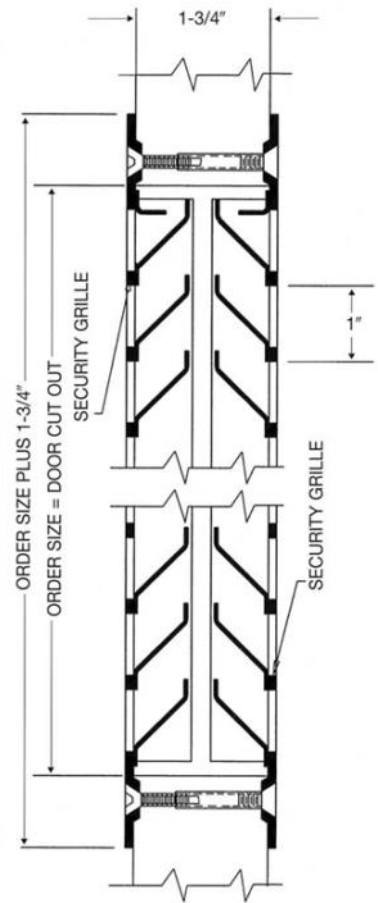

SPECIFICATIONS:

Material:	18 gauge CRS frame and blades; 12 gauge CRS security grille. Minimum size 6" X 6", Maximum size 24" x 64"
Construction:	Louvers: 2 rows of Inverted, split "Y" blades with 1" blade spacing are attached to welded frame with by interlocking construction. Non-vision design. Security Frame: Security grille is welded to on interior and exterior of louver with 13/16" square openings 1" on center. Thru-bolted to door.
Door:	1-3/4". Door cutout = order size.
Fasteners:	#8-32 Phillips head thru-bolts with blank head one side.
Finish:	Standard Electro-Galvanized base with Powder Coat Finish. _ _ (B) Mineral Bronze (standard color) _ _ (G) Gray _ _ (BK) Black _ _ (FBK) Flat Black _ _ (W) White _ _ (SB) SC Beige _ _ (SI) Silver _ _ (S) Sand _ _ (AB) AMS Beige _ _ (BRA) Brass Color Samples Online
Free Flow Area:	40% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Screen:	<input type="checkbox"/> 18 -14 mesh insect screen installed in roll formed aluminum frame <input type="checkbox"/> Aluminum <input type="checkbox"/> bronze <input type="checkbox"/> fiberglass <input type="checkbox"/> stainless <input type="checkbox"/> Bird Screen
Custom:	Custom sizes, other door thickness, Contact Customer Service.

LISTINGS & RATINGS:



1500A-HR Listed Severe Windstorm Approved Louver

Tested in Accordance with:
 ASTM E330, ASTM E1996, ANSI A250.13
 TAS 203, 201, 202, ASTM E 1886
 Impact (ft lb) 350
 DP Rating (PSF) 60
 Florida Building Code Approval File # FL13341

STOCK ITEM
FROM FL WAREHOUSE—
FOR NEXT DAY SHIPMENT

Order Format: 1500AHR _____
Example: 1500AHR 2464B W H Color

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1805

© 2018 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC

Distributed by
www.Ameraproducts.com
 Phone: (800) 608-6568
 Fax: (409) 840-5545
 info@ameraproducts.com