


Beveled Vision Lite With Continuous Glass Retainer. Recommended for Applications Requiring Safety From Wind-Borne Debris. Includes Tested and Approved Polycarbonate Glazing and Caulking.

Florida Building Code Approved


SPECIFICATIONS:

Material:	20 gauge galvanneal steel frame. Minimum size 3" x 3", maximum size 23 5/8" x 61 3/8". See testing information below					
Construction:	1-1/4" trim with mitered and welded corners, beveled return, and countersunk mounting holes in the bevel. Screws fasten from room side into pre-punched mounting holes. This mounting method leaves corridor side of frame free of fasteners for aesthetic and security purposes.					
Powder Coat Finishes:	(B) Mineral Bronze (standard color)(BK) Black(FBK) Flat Black(W) White(SB) SC Beige(SI) Silver(BRA) Brass(S) Sand(AB) AMS Beige(G) Gray View Colors Online					
Door:	For 1-3/4" door. Door cutout = order size .					
Fasteners:	#8 x 1" flathead phillips head screws to match finish.					
Glazing:	1/4" Lexan® glazing Included Glass size is 1" under order size					
Caulking:	Dow Corning 995® for caulking on both sides of glazing.					
	Glazing & Caulking included with Vision Frame					

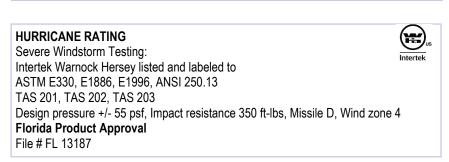

Othor



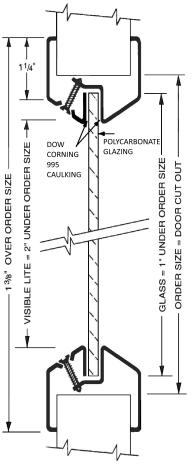

OPTIONS AT ADDITIONAL COST:

TOIXOther.							
	Order Format: VLFEZHRC		Н.	Color	PAK	Example: VLFEZHRC 1212B PAK	

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

■ AIR	Distributor:	Width:x Height:
LOUVERS	Architect:	Quantity:
ACTIVAR _{INC.}	Contractor:	Model:
CONSTRUCTION PRODUCTS GROUP	Project:	Date: Version: ALPDS1901

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE