



ROOF HATCH - Diamond Series TM - ROOF HATCH, DIAMOND SERIES 37 X 30 I GALV STEEL, WHITE TEXTURED

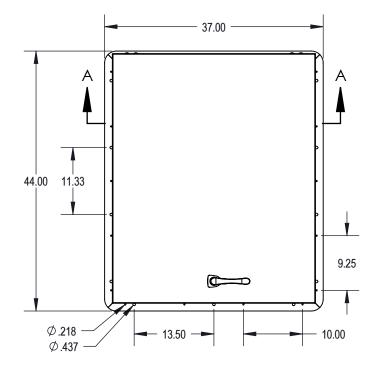

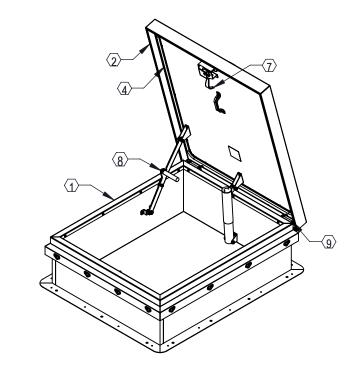



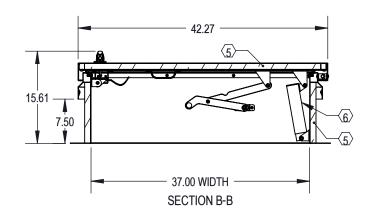

SPECIFICATIONS:

- 1. Curb: 14 gauge galvannealed steel single wall curb and counterflashing with Diamond Grip.
- 2. Cover: 14 gauge galvannealed steel formed, welded cover with 22 gauge liner, tested to support a live load of 40psf.
- 3. Finish: White, textured powder coat paint.
- Gasket: Continuous, weatherproof EPDM sponge rubber adhesive-backed seal.
- 5. Insulation: 1" polyisocyanurate in curb and cover with thermal resistance R-6.
- 6. Spring: Counterbalanced compression springs contained in clear zinc-plated steel cylinders.
- 7. Latch: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Tested to 50psf wind uplift.
- 8. Hold Open Arm: Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation.
- 9. Hinge: Heavy duty clear zinc-plated steel pintle hinge.

Notes:

For pitched roofs up to 7:12, mount hinge side parallel to slope. Door opens 75 $^\circ$

Clear Opening: 26" X 24"

Weight: 140lbs

Diamond Series[™] is a trademark of ACPG.

Distributed by www.AmeraProducts.com Phone: (800) 608-6568 Fax: (409) 840-5545 info@ameraproducts.com

MODEL #:

RHDG-7WT





Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: 1:16	Pages: 1 OF 1	Drawing #: RHDG-7WT-SUBMITTAL_A