



WASTE RECEPTACLE

□ Model 3251 – Recessed **Bradex™**

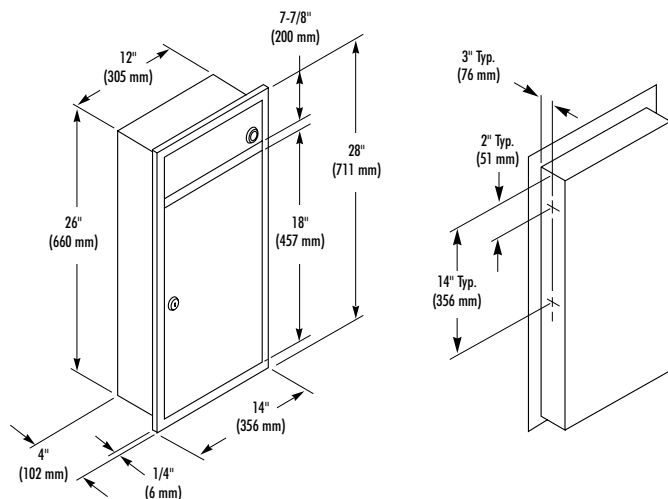

MODEL 3251

 When installed as specified below, unit meets Barrier-Free requirements

CONSTRUCTION:

- **FLANGE** fabricated of type 304 (18-8), 22 gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with 1/4" return.
- **CABINET** fabricated of type 304 (18-8), heavy gauge stainless steel. All welded construction.
- **PUSH FLAP DOOR** fabricated of type 304 (18-8), 22 gauge stainless steel. Heavy duty stainless steel piano hinge. Self-closing flap door is embossed "PUSH".
- **WASTE CONTAINER DOOR** fabricated of type 304 (18-8), 18 gauge stainless steel. Warp resistant, with full length piano hinge and tumbler lock keyed like other Bradley units.
- **WASTE CONTAINER INSERT** fabricated of leakproof molded plastic.

CAPACITY:

2.5 gal. (.4 cu. ft.).

OPERATION:

Waste container insert removable by unlocking cabinet door.

INSTALLATION:

Recessed unit requires rough wall opening 12-1/2"W x 26-1/2"H x 4"D. Top of wall opening 4' 3" above finished floor. For Barrier-Free applications, top of wall opening 3'-9" above finished floor. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

GUIDE SPECIFICATION:

Recessed waste receptacle shall be fabricated of type 304 (18-8), 22 gauge stainless steel with seamless exposed surfaces in satin finish. Cabinet door with piano hinge and tumbler lock. Push flap door covers receptacle opening. Removable 2.5 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 14"W x 28"H x 4"D.

Recessed Waste Receptacle shall be Bradley Model 3251.

Document No. 8280

This information is subject to change without formal notice.
MD 3239-1198