
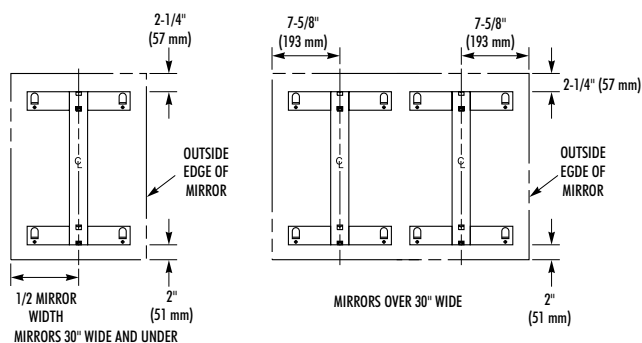


# MIRROR SHELF

- Angle Frame – Welded Corners
- Integral Shelf
- Theft Resistant Mounting

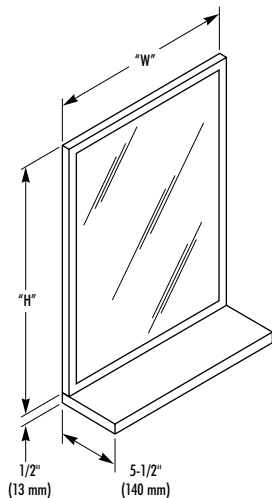

## CONSTRUCTION:

- **FRAME** fabricated of heavy-gauge, one-piece, roll-formed stainless steel, 3/4" x 3/4" angle with corners heliarc welded, ground and polished smooth to a satin finish. Double-strength continuous integral stiffener on all sides for added strength. Bevel on front of angle secures frame flush against mirror.
- **BACK** fabricated of 20-gauge galvanized steel, secured to frame with concealed screws, equipped with integral horizontal hanging brackets.
- **MIRROR** of first quality 1/4" float glass triple silver plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. Meets federal specification DD-M-00411b against silver spoilage and guaranteed for 15 years. All edges protected by shock-absorbing, neoprene tubing.
- **SHELF** fabricated of 18-gauge stainless steel with exposed surfaces in architectural satin finish. Flanged front and side with welded, ground and polished corners, welded to frame.
- **SHELF BRACKETS** fabricated of 16 gauge stainless steel are provided on units exceeding 48" width.

## INSTALLATION:

Secure concealed mounting bracket to wall with screws (included) at holes provided. **NOTE:** Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

## OPTIONAL FEATURES:

Feature	Suffix
<input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror	-2
<input type="checkbox"/> Laminate glass	-3
<input type="checkbox"/> Highly polished No. 8 architectural finish, 20-gauge stainless steel in lieu of polished float glass mirror	-4
<input type="checkbox"/> Bright annealed 20-gauge stainless steel in lieu of polished float glass mirror	-5
<input type="checkbox"/> Plexiglass	-6

**NOTE:** An inherent characteristic of a manufacturing process is distortion which may vary from mirror to mirror.

## GUIDE SPECIFICATION:

Mirror shall be framed with heavy gauge, one-piece, roll-formed, 3/4" x 3/4" stainless steel angle with double-strength continuous integral stiffener. Welded corners shall be polished to a uniform satin finish. Integral 18 gauge stainless steel shelf shall have front and side flanges with welded and polished corners. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock absorbing, neoprene tubing with Poly-Glaze protective finish. Back of unit shall be 20-gauge galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting.

**Framed Mirror and Shelf shall be Bradley Model 7805-\_\_\_\_\_ " W x \_\_\_\_\_ " H (specify width and height).**

Bradex™ Models				
Width (Inches)	Height (Inches)	Overall Dimension (Inches)	Overall Dimension (Millimeters)	Standard Model Number
16"	24"	16 x 24	406 x 610	7805-1624
* 18"	24"	18 x 24	457 x 610	7805-1824
18"	30"	18 x 30	457 x 762	7805-1830
18"	36"	18 x 36	457 x 914	7805-1836
24"	30"	24 x 30	610 x 762	7805-2430
24"	36"	24 x 36	610 x 914	7805-2436
48"	30"	48 x 30	1219 x 762	7805-4830
48"	36"	48 x 36	1219 x 914	7805-4836

Model 7805 series angle framed mirrors can be fabricated to fit any architectural requirement. To specify sizes other than those indicated above, use the following formula: Model 7805 - width in inches x height in inches. Example 7805 - 3054.

\* Indicates available Tempered glass. **Bradex™**