




Distributed by
www.Ameraproducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

MODEL No:	0953
ISSUED:	1-87
REVISED:	6-98

SURFACE MOUNTED STAINLESS STEEL MEDICINE CABINET

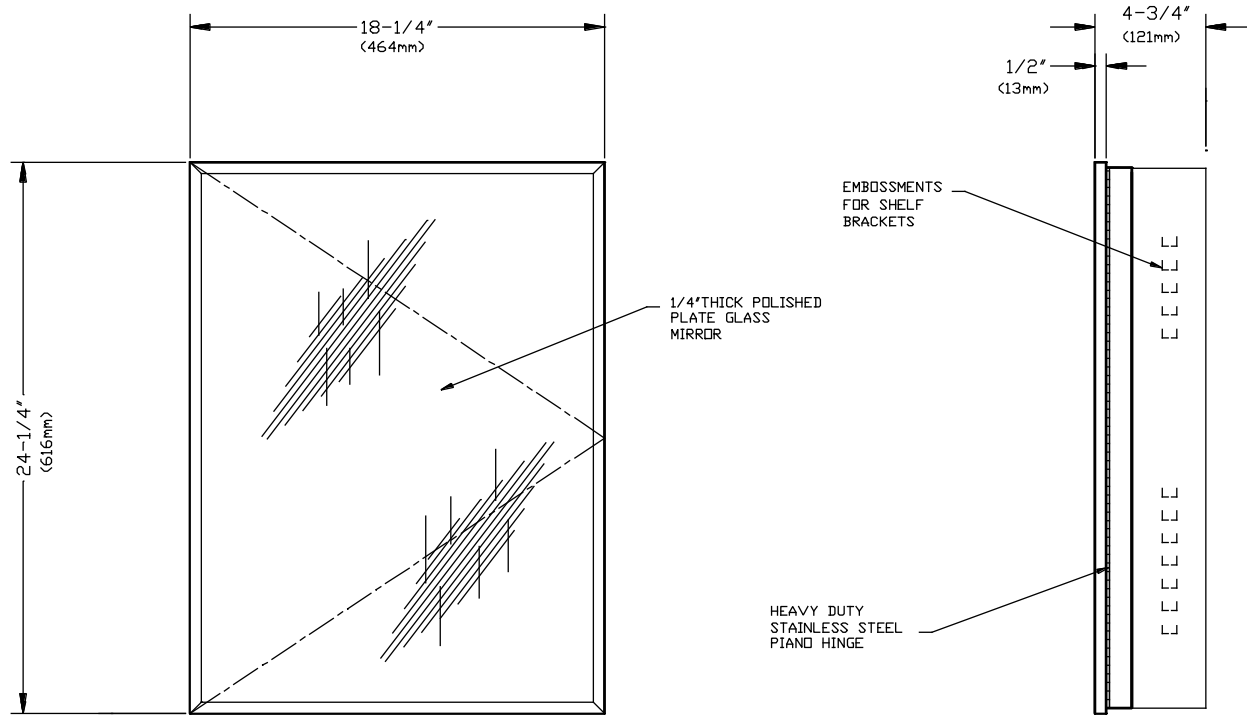

SPECIFICATION

Surface Mounted Stainless Steel Swing Door Medicine Cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, №20 gauge. All exposed surfaces shall have №4 satin finish and be protected during shipment with a PVC film easily removable after installation. Mirror glazing shall be № 1 quality 1/4" thick polished plate glass, silver coated and shall be warranted for 15 years against silver spoilage. Mirrored door shall be hung on full length 3/16" (5mm) dia. multi-staked heavy duty stainless steel piano hinge and shall be held closed by magnetic catch. Cabinet shall be provided with three (3) adjustable stainless steel shelves.

Surface Mounted Stainless Steel Medicine Cabinet shall be Model №0953 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For general utility mount cabinet 46" (1168mm) above finished floor (AFF) from bottom of unit or 12" (305mm) above top of wash basin. Secure cabinet in place with four (4) №10 self tapping screws through mounting holes in cabinet back. Cabinet is universal for left-hand door swing and may be inverted to produce a door with a right hand swing if required. For compliance with ADA Accessibility Guidelines, install unit so that bottom edge of reflecting surface is no higher than 40" (1016mm) above finished floor.

OPERATION

Access is gained to the three (3) adjustable shelves by disengaging magnetic catch and swinging open the door. Adjustable shelves permit storing various size articles.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.