

# FAHRENHEIT SERIES™ DOUBLE DOOR SMOKE VENTS - RVF

*Double door smoke vents automatically open during a fire when a fusible link melts, releasing harmful smoke and fumes.*

**Material:** Curb is 14 gauge galvanized steel and cover is 11 gauge aluminum extrusion with 24 gauge galvanized steel liner.

**Finish:** Silver prime double coat.

**Gasketing:** Continuous gasket door seal.

**Insulation:** 1/2" rigid fiberboard in curb and 1" fiberglass in covers.

**Hinges:** Heavy-duty hinges.

**Operation:** Torsion springs automatically open covers when 165°F fusible link melts or with exterior pull handle and shock absorbers control the speed of opening.

**Certifications:** UL 793 listed and labeled up to 48" x 96".

**Performance:** Covers shall open against 10 psf snow/wind load. Vent assembly rated for 40 psf live load. Covers remain closed under 30 psf wind uplift force.

**Sizes:** Minimum 48" x 48", Maximum: 60" x 96".



## UL Listed Options:

Interior pull handle

Fusible links;  212°F  350°F  360°F  370°F  386°F

McCabe links - 24VDC;  165°F  212°F  285°F



## Non-UL Listed Options:

Fusible links;  286°F

McCabe links - 120VAC;  165°F  212°F  285°F

Curb-mount

Double-wall curb

Standing seam curb: Manufacturer & Model \_\_\_\_\_

Curb height: \_\_\_\_\_

## Accessories Sold Separately:

Security Grille (RSGD): 1/2" diameter steel rod 6"x12" spacing with 1-1/4" x 1-1/4" drop in flange, prime coat gray.

QTY	MODEL	PREVIOUS MODEL		CURB OPENING
		JL	DUR-RED	
	RVFGA-4848PSI	UFV-1	UFV-1	48" x 48"
	RVFGA-4872PSI	UFV-2	UFV-2	48" x 72"
	RVFGA-4890PSI	UFV-3	UFV-3	48" x 90"
	RVFGA-4896PSI	UFV-4	UFV-4	48" x 96"
	RVFGA-6060PSI	UFV-5	UFV-5	60" x 60" (not UL listed)
	RVFGA-6096PSI	UFV-6	UFV-6	60" x 96" (not UL listed)
	Custom:	--	--	




**DUR-RED PRODUCTS**



Distributor:	Project:
Contractor:	Approved By:
Date:	Architect:
Scale: N/A   Pages: 1 of 2	Item #

# FAHRENHEIT SERIES™ DOUBLE DOOR SMOKE VENTS - RVF

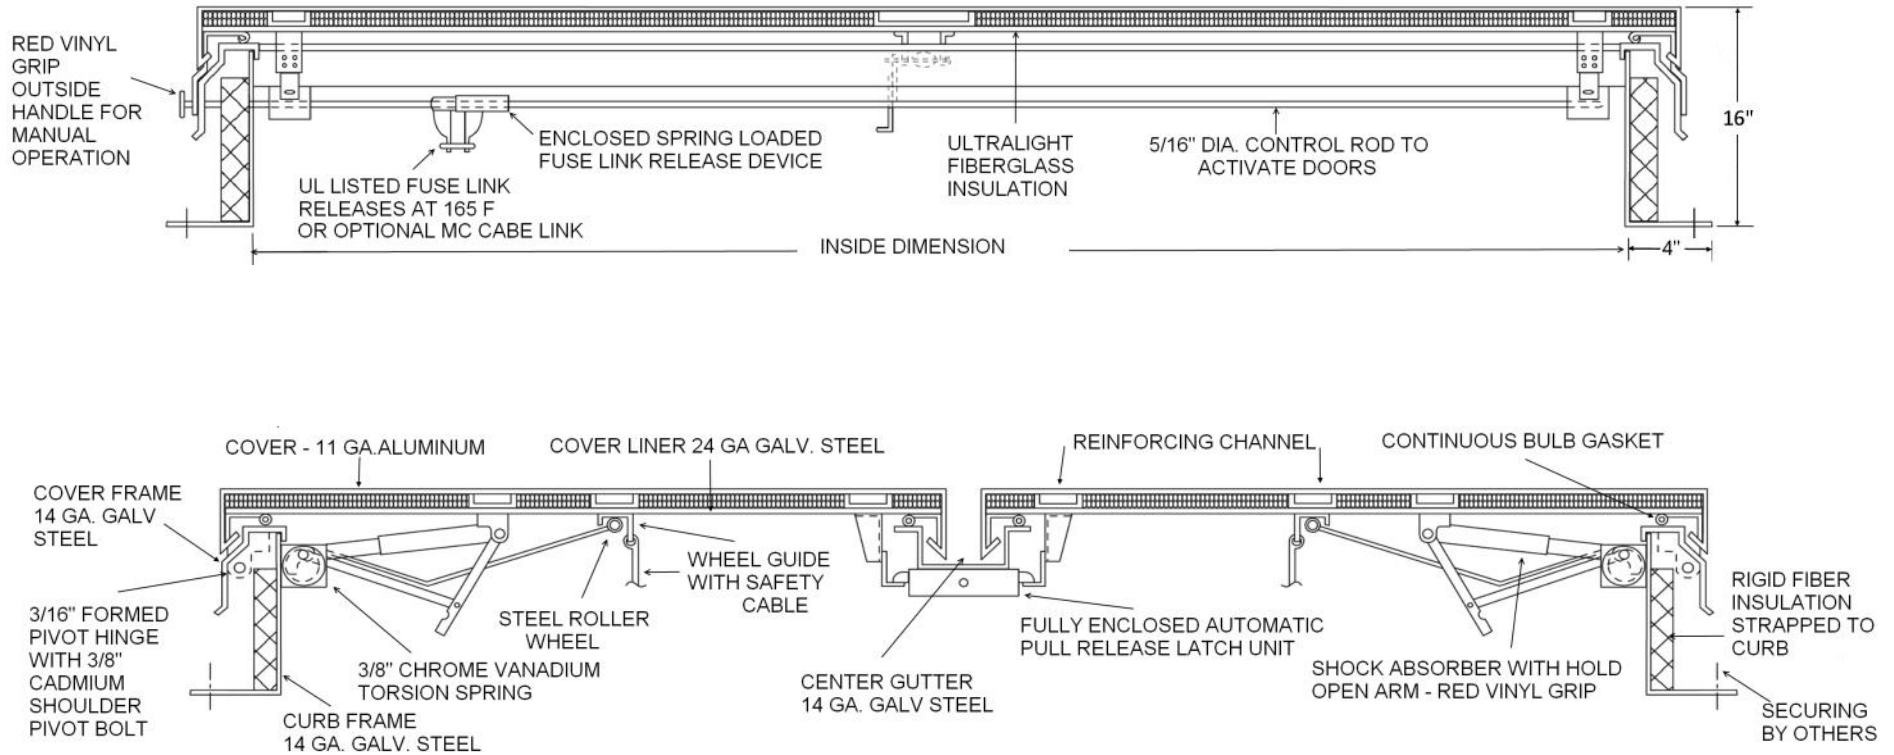

**DUR-RED PRODUCTS**

Distributed by  
[www.Ameraproducts.com](http://www.Ameraproducts.com)  
 Phone: (800) 608-6568  
 Fax: (409) 840-3345  
[info@ameraproducts.com](mailto:info@ameraproducts.com)

<b>Distributor:</b>	<b>Project:</b>
<b>Contractor:</b>	<b>Approved By:</b>
<b>Date:</b>	<b>Architect:</b>
<b>Scale: N/A</b>   <b>Pages: 2 of 2</b>	<b>Item #</b>